


Permissible deviations for basic size range acc ISO-2768-1

Description and designation	0,5<dim<3,3	3,3<dim<6,6	6,6<dim<30	30<dim<120
fine (f)	±0,05	±0,05	±0,1	±0,15
medium (m)	±0,1	±0,1	±0,2	±0,3
coarse (c)	±0,2	±0,3	±0,5	±0,8
very coarse (v)	---	±0,5	±1	±1,5

Tol acc SS-ISO 228/1

G 1/8"	G 1/4" - G 3/8"	G 1/2" - G 3/4"	G 1" - G 2"	G 2 1/4" - G 6"
inv: +0,282	+0,445	+0,541	+0,64	+0,64
Utv: -0,214	-0,250	-0,284	-0,36	-0,434

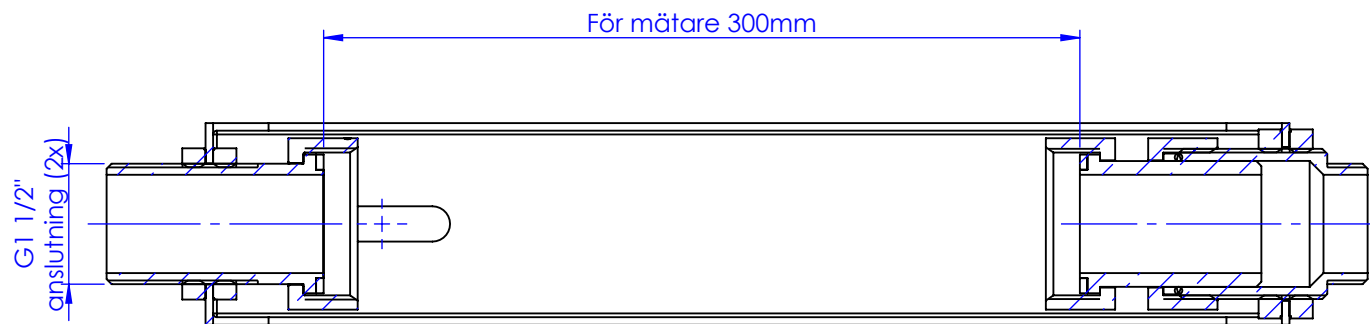

SECTION B-B

Art. Nr. 5208154

Vikt: 4929.04 g
Volym:

Tol. där ej annat anges:
SS-Iso 2768-1m
Gjutna ytor SS-Iso 2768-1c
Skarpa kanter brytes

Bearb ytor
3,2
Där ej annat anges

Nr.	Anl.	Ändring och/eller medd.nr.	Datum	Inf.	Godk.

Det.nr.	Anta	Benämning			Material		Mod.nr.	Änne Dimension	Anmärkning		
Konstr.	Ritad	Kop.	Rev.	uppfölj	Stand.	Godk.	Skala	Ersätter	Ersatt av		
DR	DR						1:3				
EZZE							VAMCO 20 m³			Sheet:	Datum
										1/1	2008-06-11
EZZE							VAMCO 20 m³			Ritn.-nr.	
										1-911-0	